

COLD
PLASMA
CLEAN®

EXTREMEAIR® cPc HAND DRYER SERIES



White ABS



Steel White Epoxy



Steel Black Graphite



Steel Satin Chrome



Stainless Steel

EXTREMEAIR CPC FEATURING EXCLUSIVE COLD PLASMA CLEAN® TECHNOLOGY

The **EXTREMEAIR CPC** hand dryer features our exclusive high performance cold plasma generator. The generator is 100% maintenance free, uses no chemicals and doesn't create harmful levels of ozone.

STANDARD FEATURES:

Adjustable Sound & Speed

A dial inside the dryer provides easy sound adjustment from 83 to 69 dB, with a speed of 19,000 to 10,000 LFM. There is NO need to upgrade or replace parts.

Universal Voltage

The **EXTREMEAIR** can be connected to any voltage from 100 to 240 volts, 50/60 Hz. The dryer configures itself to your voltage, making installation easier.

Money Saver

- Save up to 98% versus paper towel costs
- Dry up to 100 pairs of hands for the cost of one paper towel.
- Dry 1,000 pairs of hands for only \$0.42

5-Year Premium Warranty

Includes same-day factory repair or shipment of replacement parts. See owner's manual for details.

Green Certifications

The **EXTREMEAIR** hand dryer has been GreenSpec® Listed. This is an unbiased list of the most environmentally friendly products published by the editors of Environmental Building News. The **EXTREMEAIR** met tough GreenSpec standards because it uses 80-90% less energy than conventional hand dryers and reduces maintenance and waste. The **EXTREMEAIR** also helps facilities qualify for LEED Credits.



CPC SPECIFICATIONS

Dry Time	10 + Seconds (Adjustable)
Air Velocity	19,000-10,000 LFM (Linear Feet per Min.)
Sound Level	83 - 69 dB
Air Temperature	135° F at 72° F room temperature
Universal Voltage	100-240 V, 50/60Hz
Power	12.5 A max. @ 120 V, 6.5 A max. @ 240 V 1500 - 800 W adjustable

CPC MODEL REFERENCE CHART

White ABS	CPC9
Steel White Epoxy	CPC9-M
Steel Black Graphite	CPC9-BG
Steel Satin Chrome	CPC9-C
Stainless Steel	CPC9-SS
Dimensions: 10-1/8" W x 9-3/8" H x 5-5/8" D	



5700 McDermott Drive | Berkeley | IL 60163

Ph 734.421.2400 | Fx 734.421.5580

americandryer.com

sales@americandryer.com

Rev: Feb 2016

EXTREMEAIR® CPC, GXT & EXT HAND DRYER SERIES



White ABS



Steel White Epoxy



Steel Black Graphite



Steel Satin Chrome



Stainless Steel

COMPACT • HIGH SPEED • ENERGY EFFICIENT

Compact

The **EXTREMEAIR** is the most compact hand dryer in the industry. It's 43% smaller than old "industry standard" high-speed hand dryers.

Vandal Resistant

Two tamper-resistant screws secure the heavy-duty, vandal-resistant cover to the steel base. Motor, heater and electronics are inaccessible to vandals. Air intake is shielded for additional safety. Indestructible one piece fixed nozzle.

Heating Element (cPc and gXt Series)

The heating element has an automatic thermal protector and operates in the black range for maximum life.

Heavy-Duty, One-Piece Cover Options

- Flame-retardant white ABS
- Steel with white epoxy finish (M)
- Steel with black graphite epoxy finish (BG)
- Steel with satin chrome finish (C)
- Stainless steel with #4 brush finish (SS)

5-Year Premium Warranty

Includes same-day factory repair or shipment of replacement parts. See owner's manual for details.

CPC SERIES – COLD PLASMA CLEAN

IMPROVES AIR QUALITY • FASTEST
MAXIMUM PERFORMANCE • ENERGY EFFICIENT

135° F air temperature at 72° F room temperature
10+ seconds adjustable drying time
1500-800 watts adjustable power

GXT SERIES

FASTEST • ENERGY EFFICIENT

135° F air temperature at 72° F room temperature
10+ seconds adjustable drying time
1500-800 watts adjustable power

EXT SERIES – NO HEAT

GREENEST • NO DEDICATED LINE REQUIRED
CONNECT UP TO 3 DRYERS ON ONE LINE!

85° F air temperature at 72° F room temperature
12+ seconds adjustable drying time
500-300 watts adjustable power

EXTREMEAIR MODEL REFERENCE CHART

	CPC SERIES	GXT SERIES	EXT SERIES – NO HEAT
White ABS	CPC9	GXT9	EXT7
Steel White Epoxy	CPC9-M	GXT9-M	EXT7-M
Steel Black Graphite	CPC9-BG	GXT9-BG	EXT7-BG
Steel Satin Chrome	CPC9-C	GXT9-C	EXT7-C
Stainless Steel	CPC9-SS	GXT9-SS	EXT7-SS
Dimensions Surface	10-1/8"H x 9-3/8"W x 5-5/8"D	10-1/8"H x 9-3/8"W x 5-5/8"D	10-1/8"H x 9-3/8"W x 5-5/8"D
	Universal Voltage 100-240 V 50/60Hz 12.5 A max. @ 120 V 6.5 A max. @ 240 V 1500-800 W Adj	Universal Voltage 100-240 V 50/60Hz 12.5 A max. @ 120 V 6.5 A max. @ 240 V 1500-800 W Adj	Universal Voltage 100-240 V 50/60Hz 4.5 A max. @ 120 V 2.3 A max. @ 240 V 500-300 W Adj

DRYER PLACEMENT :

Dryers should be placed at least 2 feet apart and at least 12" from washbasin. Do not install dryer over washbasin. Automatic dryers should be at least 18" above any projection which may interfere with the operation of the automatic sensor. In congested areas the dryers should be located to create a flow from the washbasin to the dryer and to the exit. Recommended mounting heights are shown in the table below.

DRYER INSTALLATION

Dryers must be installed by a licensed electrician. A single phase dedicated 15 amp or 20 amp electrical line is required. (The **EXT** series does not require a dedicated line.) Dryers must be properly grounded. One side of dryer should be mounted to a stud. All surface mount dryers are provided with conduit entrances for both in-wall and surface wiring. For indoor use only.

QUANTITY ESTIMATE, HAND DRYER:

Average traffic washroom...1 dryer per 2 washbasins
 Heavy traffic washroom..... 1 dryer per washbasin
 54" wash fountain.....4 dryers per sink

SHIPPING WEIGHT:

ABS 9 lbs, M/BG/C/SS 10 lbs

RECOMMENDED MOUNTING HEIGHTS FROM BOTTOM OF DRYER TO FINISHED FLOOR

	Men	Women	Children	Disabled
All Hand Dryers	44"	42"	32" - 42"	36"

Proven cold plasma technology has been used to improve air quality in commercial buildings since the 1930s. Schools, hospitals, and other facilities use this technology to keep the air clean. More recently, cold plasma has been used in the medical industry to treat surgical incisions and break down harmful microbes in the food processing industry. Today, the **EXTREMEAIR CPC** hand dryer harnesses the power of cold plasma technology.




ACCESSORIES



ADA-WG
WALL GUARD




ADA-RK
RECESS KIT



AP
ADAPTER PLATE

Accessories Reference Chart	
ADA-WG	ADA Compliant seamless stainless steel wall guard
ADA-RK	ADA Compliant seamless stainless steel recess kit
AP	Stainless steel universal adapter plate

For more information, visit americandryer.com

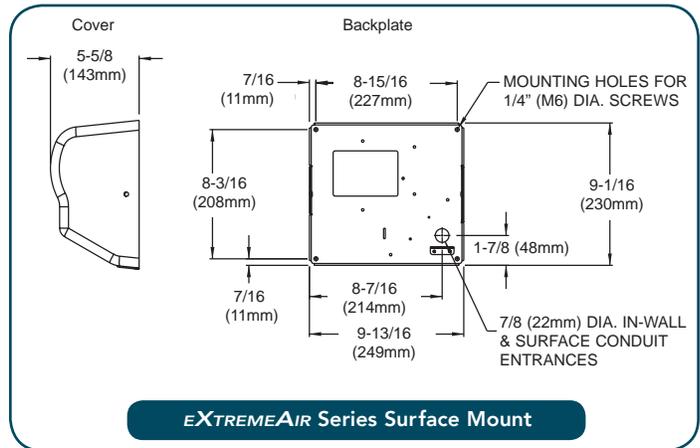

 **American Dryer, Inc.**
 33067 Industrial Road | Livonia, MI 48150 | U.S.A.
 Toll Free 800.485.7003 U.S. | Ph: 734.421.2400 | Fax 734.421.5580
 Web: www.americandryer.com
 Email: sales@americandryer.com
 © American Dryer, Inc. All Rights Reserved. Rev. May 2014